



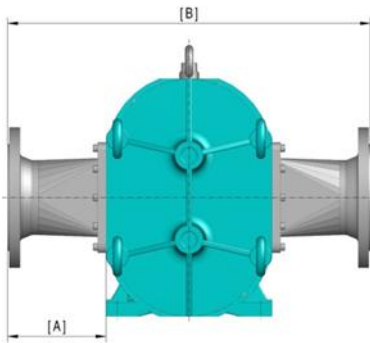

Design 1 | Short, straight pipe connectors with connection flange and O-ring seal (approx.)

Nominal diameter:	Standard: Dimension:	CL 260				Size CL 390				CL 520			
		DIN/DIN EN		ANSI/ASME		DIN/DIN EN		ANSI/ASME		DIN/DIN EN		ANSI/ASME	
		A	B	A	B	A	B	A	B	A	B	A	B
DN 50 (2")		—	—	184	663	153	601	172	639	—	—	—	—
DN 80 (3")		170	635	190	675	195	685	215	725	—	—	—	—
DN 100 (4")		165	625	189	673	160	615	184	663	260	815	284	863
DN 125 (5")		150	595	184	663	175	645	209	713	250	795	284	863
DN 150 (6")		180	655	214	723	160	615	194	683	165	625	199	693
DN 200 (8")		260	815	300	895	260	815	300	895	175	645	215	725
DN 250 (10")		—	—	—	—	295	885	329	953	245	785	279	853
DN 300 (12")		—	—	—	—	370	1.035	416	1.127	—	—	—	—


Production-related deviations in individual dimensions within an acceptable tolerance cannot be ruled out.
Requests for dimensions regarding a specific order are welcome.

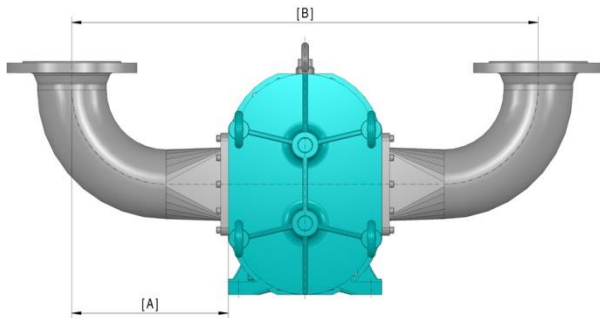

Design 2 | 90° elbow up in mm (approx.)

Nominal diameter:	Standard: Dimension:	CL 260				Size CL 390				CL 520			
		DIN/DIN EN		ANSI/ASME		DIN/DIN EN		ANSI/ASME		DIN/DIN EN		ANSI/ASME	
		A	B	A	B	A	B	A	B	A	B	A	B
DN 80 (3")		—	—	—	—	259	813	259	813	—	—	—	—
DN 100 (4")		266	827	266	827	261	817	261	817	361	1.017	361	1.017
DN 125 (5")		285	865	285	865	310	915	310	915	385	1.065	385	1.065
DN 150 (6")		354	1.003	354	1.003	334	963	334	963	339	973	339	973
DN 200 (8")		503	1.301	503	1.301	503	1.301	503	1.301	418	1.131	418	1.131


Production-related deviations in individual dimensions within an acceptable tolerance cannot be ruled out.
Requests for dimensions regarding a specific order are welcome.

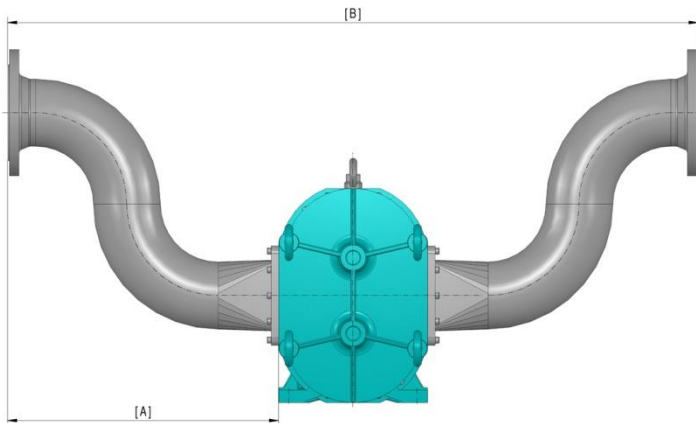

Design 6 | Gooseneck version in mm (approx.)


Nominal diameter:	Standard: Dimension:	CL 260				Size CL 390				CL 520			
		DIN/DIN EN		ANSI/ASME		DIN/DIN EN		ANSI/ASME		DIN/DIN EN		ANSI/ASME	
		A	B	A	B	A	B	A	B	A	B	A	B
DN 80 (3")		—	—	—	—	423	1.141	443	1.181	—	—	—	—
DN 100 (4")		471	1.237	495	1.285	466	1.227	490	1.275	566	1.427	590	1.475
DN 125 (5")		541	1.377	575	1.445	555	1.405	589	1.473	630	1.555	665	1.625
DN 150 (6")		638	1.571	672	1.639	618	1.531	652	1.599	623	1.541	657	1.609
DN 200 (8")		870	2.035	910	2.115	870	2.035	910	2.115	785	1.865	825	1.945

Production-related deviations in individual dimensions within an acceptable tolerance cannot be ruled out.
Requests for dimensions regarding a specific order are welcome.

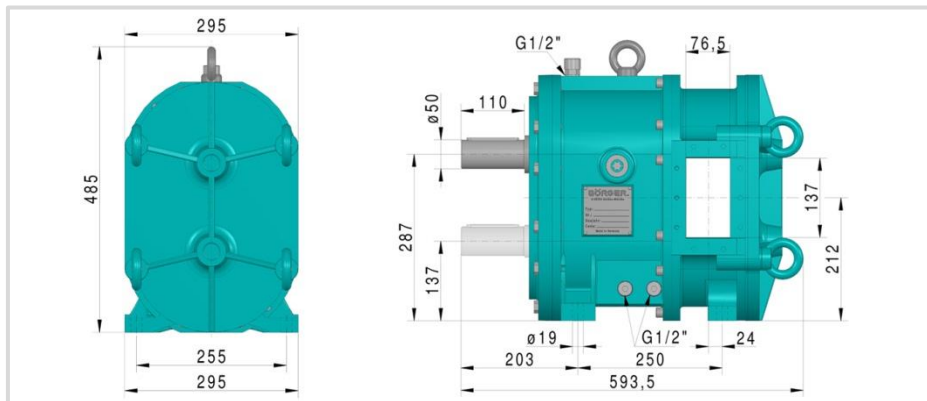


CL 260

Weight: 185 kg

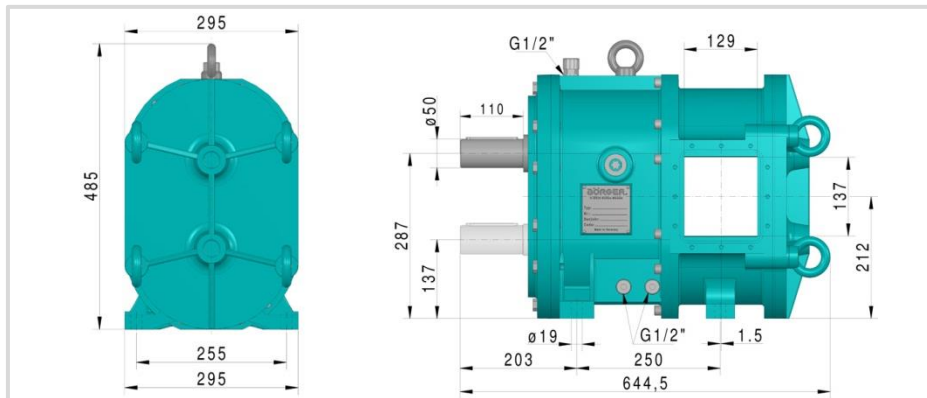

CL 390


Weight: 205 kg

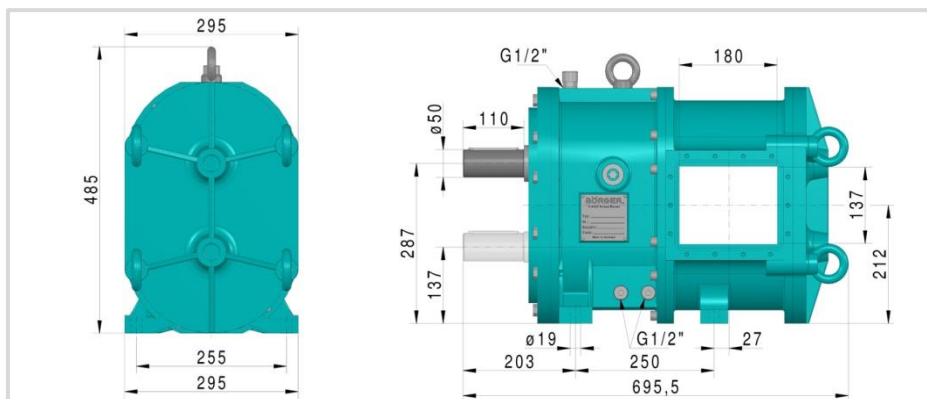

CL 520

Weight: 225 kg

Production-related deviations in individual dimensions within an acceptable tolerance cannot be ruled out.
Requests for dimensions regarding a specific order are welcome.

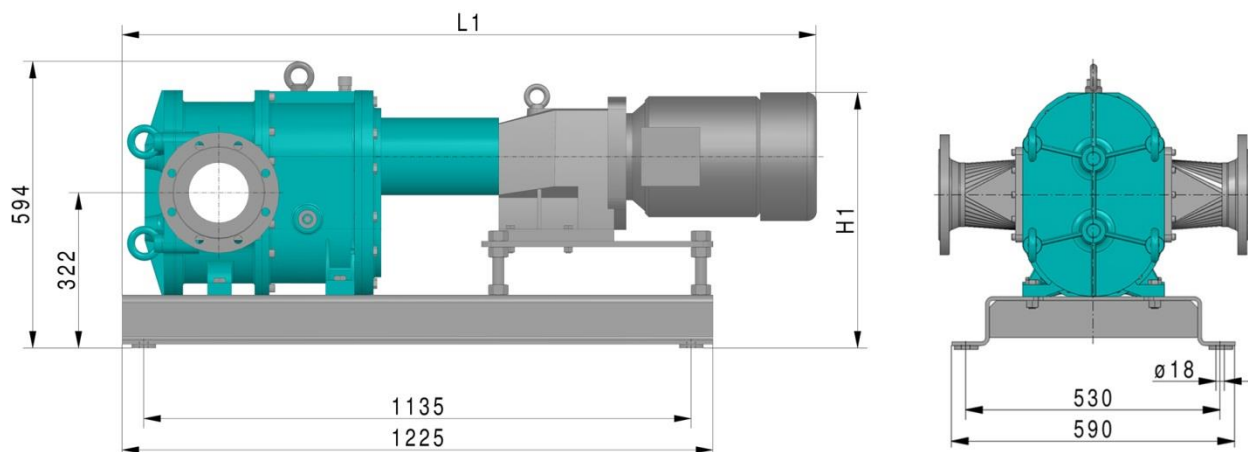

Standard unit in mm (approx.)

Drive [kW]	CL 260			Size CL 390			CL 520		
	Weight [kg]	Dimensions		Weight [kg]	Dimensions		Weight [kg]	Dimensions	
		L1	H1		L1	H1		L1	H1
3	326	1.365	500	352	1.365	500	376	1.406	500
4	338	1.390	515	364	1.390	515	388	1.431	415
5,5	360	1.525	530	385	1.525	530	409	1.566	530
7,5	370	1.525	530	396	1.525	530	420	1.566	530
9,2	386	1.560	530	410	1.560	530	435	1.601	530
11	412	1.665	557	438	1.665	557	462	1.706	557
15	476	1.665	557	501	1.665	557	526	1.706	557
18,5	516	1.680	565	515	1.775	576	540	1.816	576

Production-related deviations in individual dimensions within an acceptable tolerance cannot be ruled out.
Requests for dimensions regarding a specific order are welcome.